


1.3.1 MEZ-CLASSIC-FLANGE SYSTEM 20

- 45° supporting limb provides for optimum stability
- With a simple sealing bead
- High quality profile using thicker material
- More stiffness even for large edge lengths
- Profile length: 5000 mm

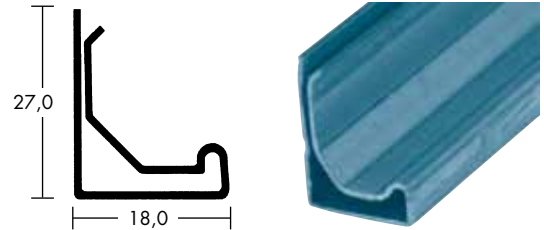

Art.-Nr.	Material	Material thickness/mm	Moment of inertia /cm ⁴	VPE m	Weight kg/m
120	Galvanised steel	0,85	0,313	500	0,584
121	Galvanised steel	1,00	0,389	500	0,675
120 E	Stainless steel	0,85	0,313	500	0,584
121 A	Aluminium	0,85	0,190	500	0,204


Workmanship Guidelines:

Art.-Nr.	Maximum edge length (mm)		
	500 PA	1000 PA	2500 PA
120	1200 mm	1000 mm	800 mm
121	1400 mm	1200 mm	1000 mm


- The duct grooved seams do **not** need to be notched up
- For details on frame production see technical features

MEZ-CORNER


- Corner to be attached to the duct wall
- Sealing of the corners done on the inside of the air duct wall

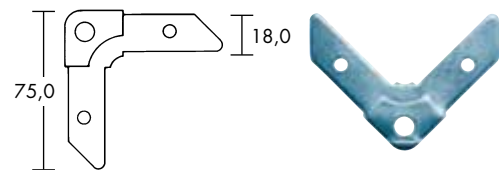

Art.-Nr.	Material	Material thickness/mm	Screw hole ø mm	Deduction mass mm	VPE units	Weight kg/piece
220	Galvanised steel	3,00	9	10	500	0,047

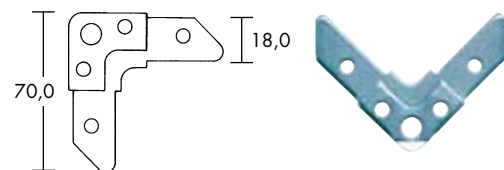

Art.-Nr.	Material	Material thickness/mm	Screw hole ø mm	Deduction mass mm	VPE units	Weight kg/piece
224	Galvanised steel	3,00	9	30	500	0,048

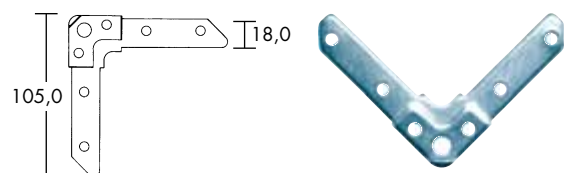


Art.-Nr.	Material	Material thickness/mm	Screw hole ø mm	Deduction mass mm	VPE units	Weight kg/piece
225	Galvanised steel	3,00	9	30	500	0,063
225 E	Stainless steel	3,00	9	30	500	0,063
225 A	Aluminium	3,00	9	30	500	0,020



1.3.1 MEZ-CLASSIC-FLANGE SYSTEM 20

MEZ-CORNER

- Corner for square bolt to be attached to the duct wall
- Sealing of the corners done on the inside of the air duct wall

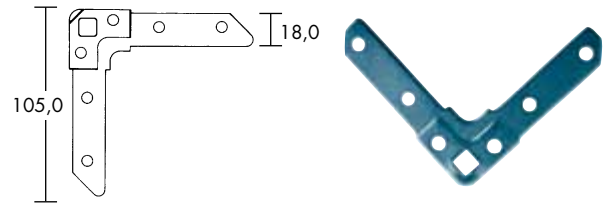

Art.-Nr.	Material	Material thickness/mm	Screw hole ø mm	Deduction mass mm	VPE units	Weight kg/piece
225 V	Galvanised steel	3,00	9 x 9	30	500	0,063

