


Flexible connections with sheet metal border

2.3.4 MEZ-EKA-BAND PVC Explosion-proof

- PVC-coated carrier material
- Not easily inflammable as per LOBA-guidelines

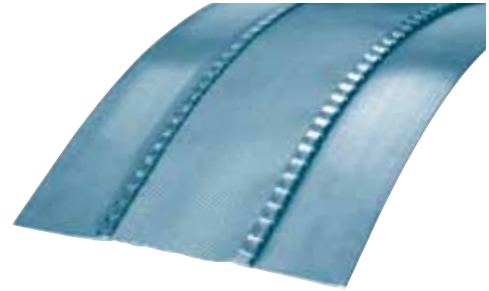

Art.-Nr.	Material	Metal sheet mm	Fibre mm	Metal sheet mm	Temperature resistance		VPE m	Weight kg/m
					from	to		
520EX	PVC	45	60	45	-10°C	+70°C	25	0,540
521EX	PVC	65	95	65	-10°C	+70°C	25	0,636

Technical Specifications:

Carrier material:	DIN 60001, PES
Denier:	DIN 53830, 1100 dtex
Bonding:	Weft rustle
Coating type:	PVC
Total weight:	DIN 53352, 630 g/sq.m
Tear-out force:	DIN 53354, Chain 1500/Weft 1500 N/50 mm
Flexural strength:	DIN 53354
Weather tear resistance:	DIN 53356, Chain 200/Weft-N 200
Adhesive strength:	Complan-Guidelines
Low-temperature resistance:	DIN 53361, -10°C
Heat resistance:	Complan-Guidelines, +70°C
Light fastness:	DIN 54004
Buckling resistance:	DIN 53359 A, > 25.000
Burning behaviour:	Not easily inflammable as per LOBA-guidelines
Comments:	Surface resistance < 1 x 10 ⁸ Ohm